


T82E33.50 55 Way Modulo Connector

From: 2 x TB AMPLIFIERS AND COMPRESSOR
STEREO CANS
To: MASTER MODULE SL651E

No	Description	No	Description
1	Spare	29	Spare
2	Spare	30	Spare
3	Spare	31	Keyway
4	Spare	32	K (T3)
5	Spare	33	J (T3)
6	Spare	34	H
7	Spare	35	Not Used
8	Spare	36	A) TXR 2
9	Spare	37	C)
10	Spare	38	D)
11	Spare	39	B)
12	Spare	40	Spare
13	Spare	41	Not Used
14	TB Amps + Compressor Output-	42	1.5V
15	TB Amps + Compressor Output+	43	Not Used
16	K (T2)	44	Spare
17	J (T2)	45	G (+48V)
18	Not Used	46	Not Used
19	H	47	+48V
20	Spare	48	Not Used
21	A) TXR 1	49	+20V
22	C)	50	Not Used
23	D)	51	-20V
24	B)	52	Not Used
25	Spare	53	OV
26	Not Used	54	OV
27	Not Used	55	OV
28	Not Used		

Copyright©SSL All rights reserved.
This document may not be
reproduced in any form without the
written permission of SSL

Rev.	Issue	Details
6	a	REDRAWN 4/84 O.D.

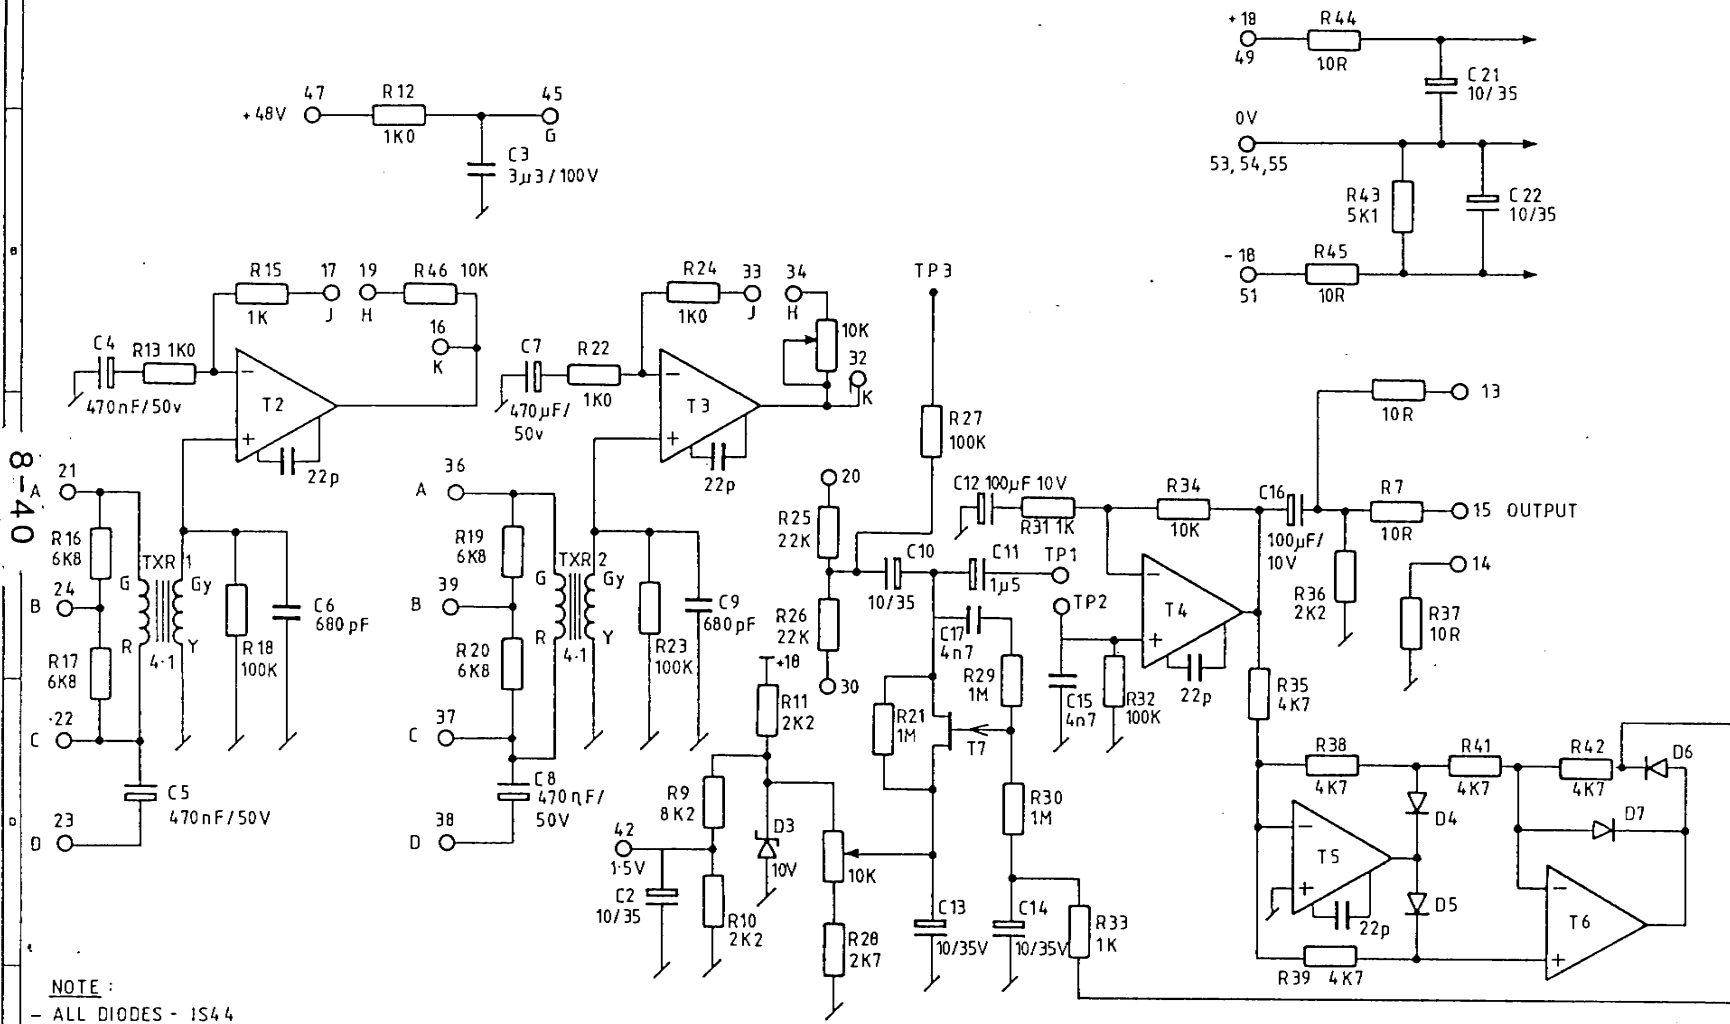


NOTE :

- ALL DIODES - 1S44
- LISTEN MICS USE INPUTS A & C. LINK B & G
GAIN POT ON FRONT PANEL BETWEEN K & J
- TB MICS USE AD, DO NOT LINK BG
LINK A + 0V, LINK J + H
- SCREENED WIRE TO TB POTS
- T2 → 5-55 34N, T6 - T



MICS SSL TYPE 40CKAAC7




OLD TYPE

Title CF82B33 TALKBACK
(LISTEN) AMPLIFIERS
AND COMPRESSOR

Drg.No. T82033-71

Sol. State Logic

Stonesfield · Oxford · England


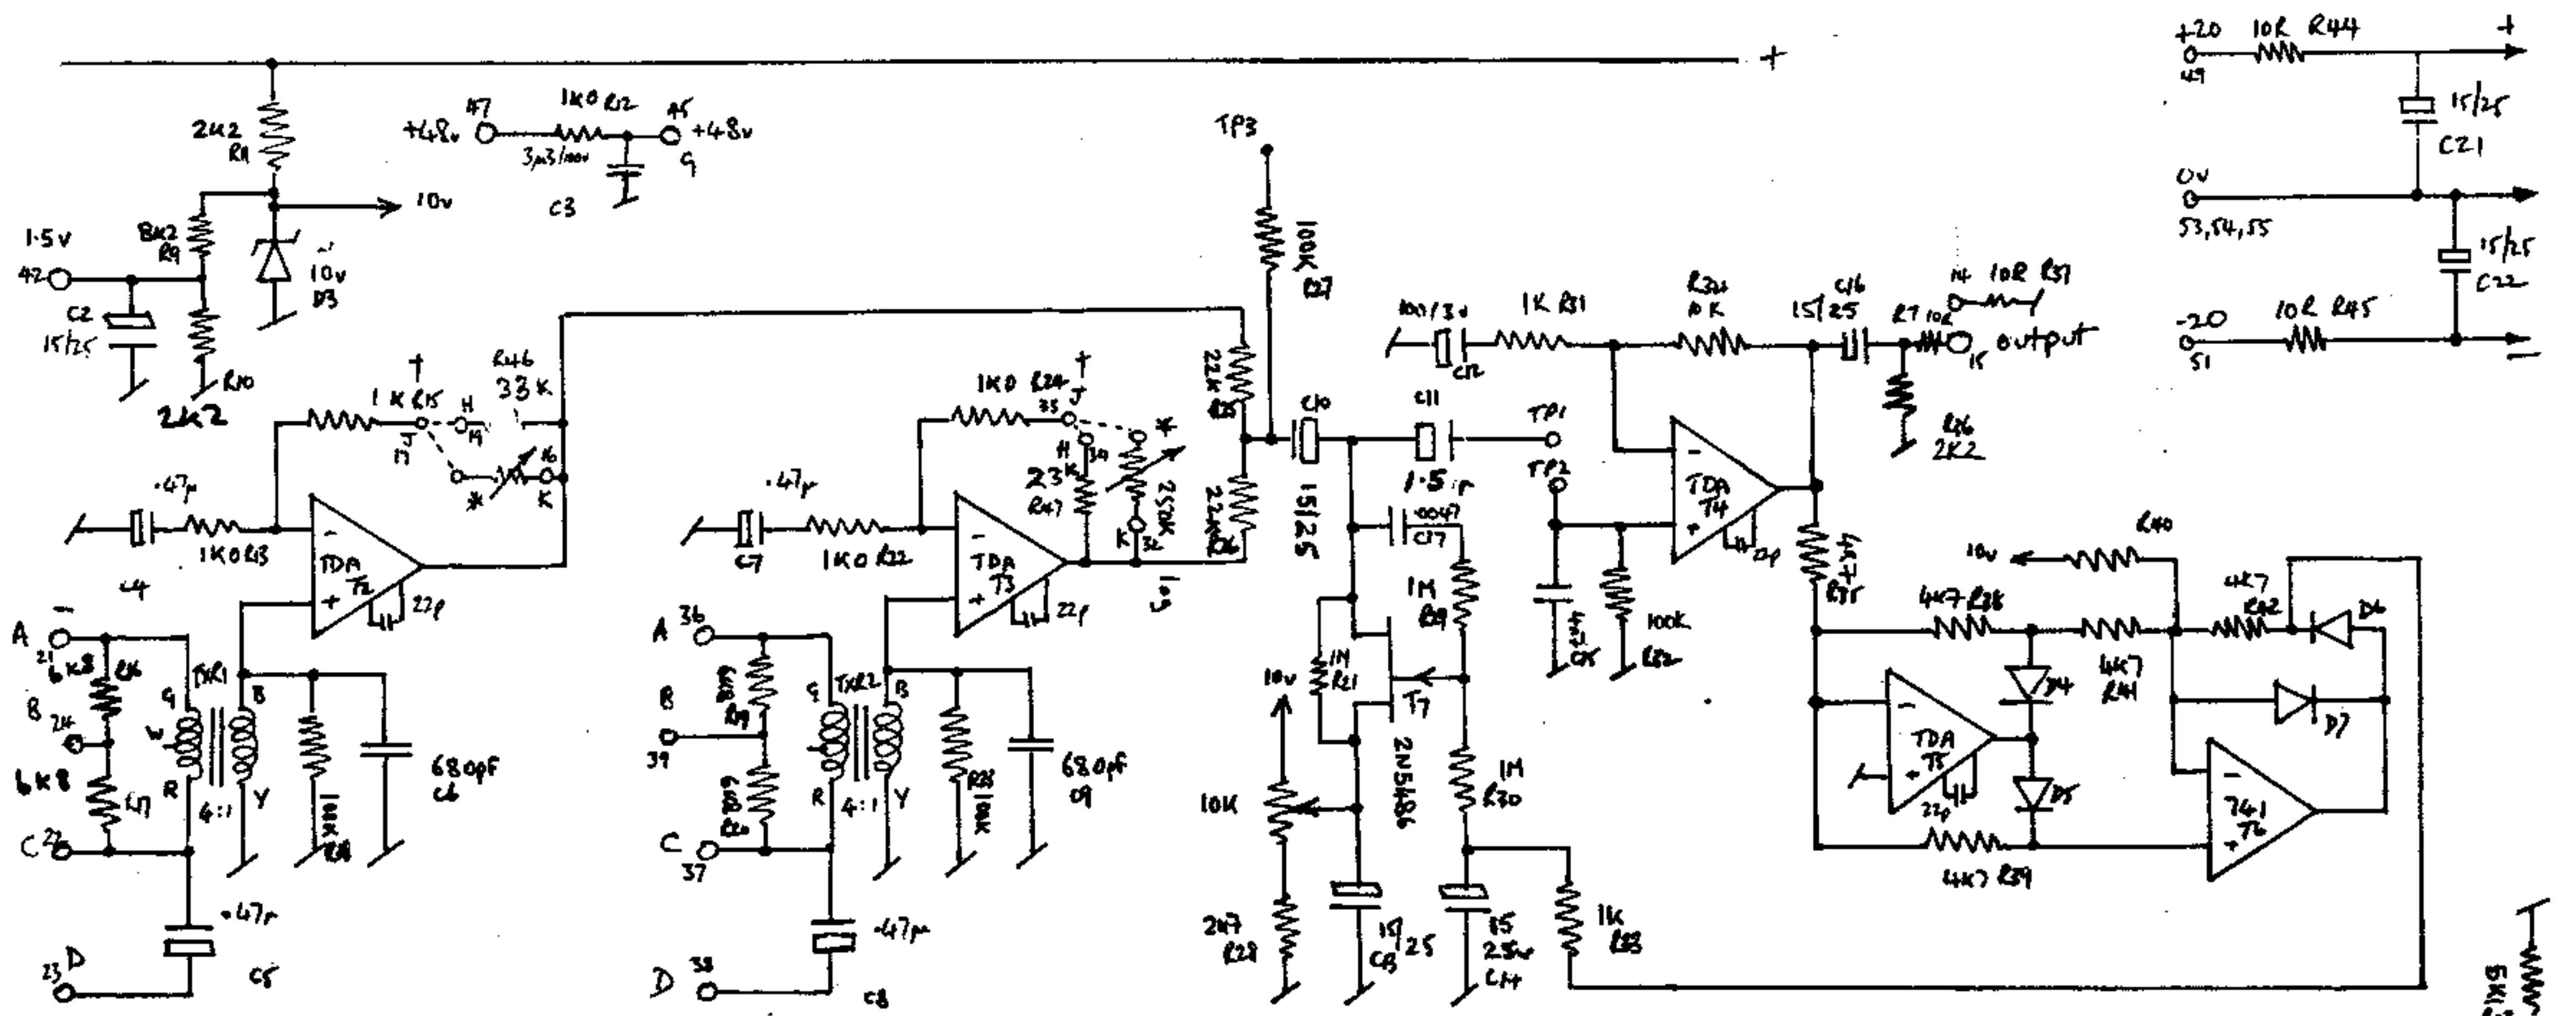


All under 15W
 Listen Mics use inputs A+C, link B+G
 9in pot on front panel, between K+J

TB mics use AD, do not link BG
 Link A+0V
 Link J+H

Eagle Mic Colors: Blue = Common, to A = Braided
 Green = Signal, to D = Black - Blue
 Red = 1.5V = Red

+ Screened wire to TB Pots

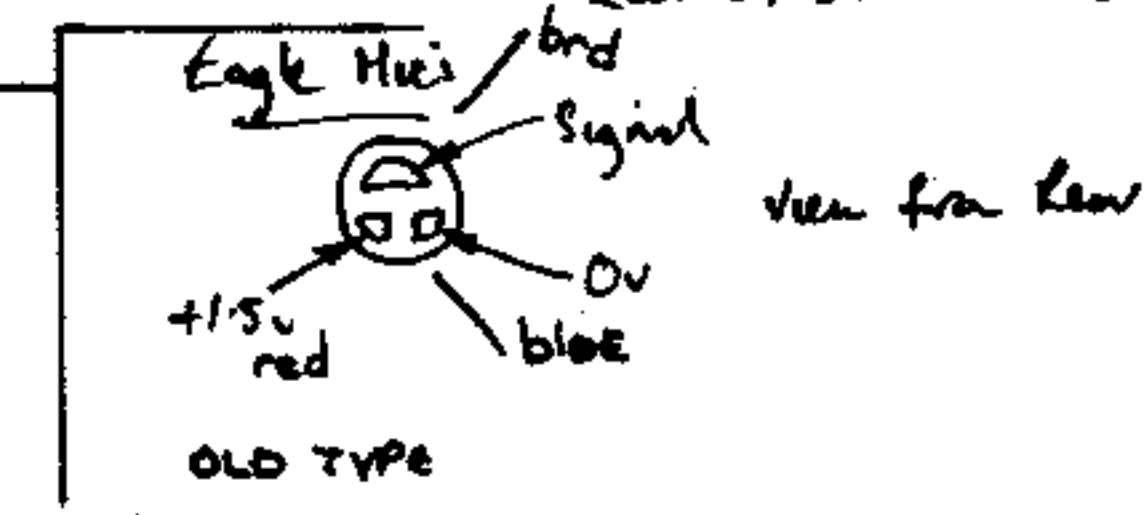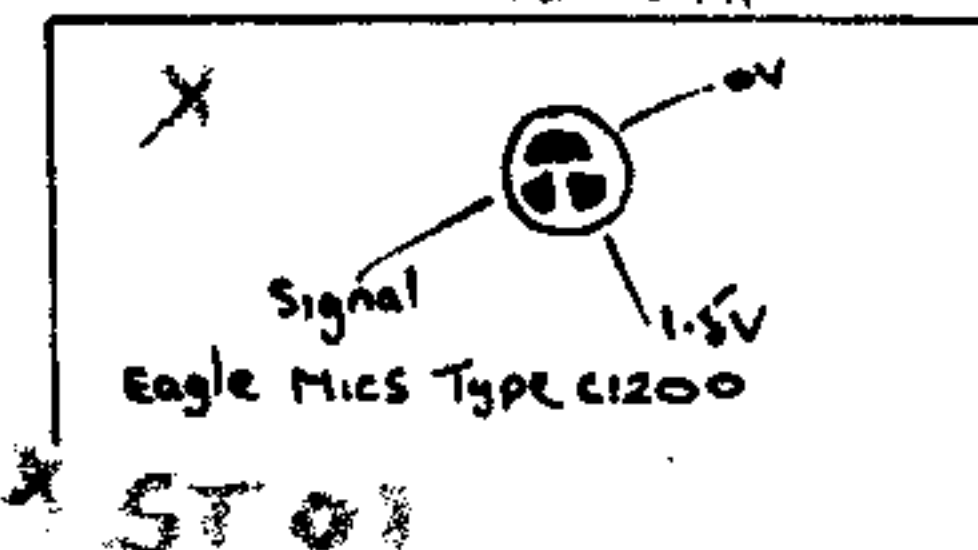

Exp C22 D7

SSL 4000E
 Talkback
 CF82B33

CF82B33
 TALKBACK (LISTEN) AMPLIFIERS AND COMPRESSOR

82B33.03.4.780-4